

# TRUST THE RANGE BE THE BENCHMARK

## Laser Rangefinder w/ Slope

# PRF-SERIES

800YD / 1200YD



### Features

- ★ Measure 1,100 meters in 0.3 seconds\*
- ★ Over 500-meters the accuracy is  $\pm 0.3\%$
- ★ IP54 Protection, fit for every condition
- ★ Compact and fit your palm design



\*It will be different depending on models.



### Measure The Range In No Time

The laser comes out with a accurate-tuned pulse to beat any atmosphere condition, it works with our super speedy measuring formula and a premium multi-layers coating to help you get the most range in 0.3 seconds for 1,100 meters (1200 yards)\*. This looks complex but we do this every time when you hit the measure button and we are proud to do this with you.

\*It will be different depending on models.

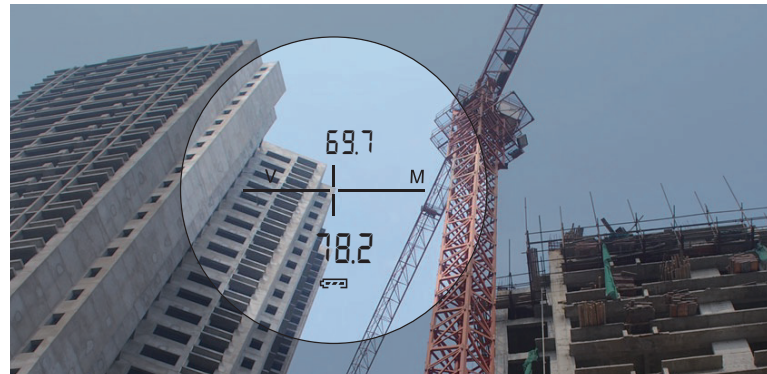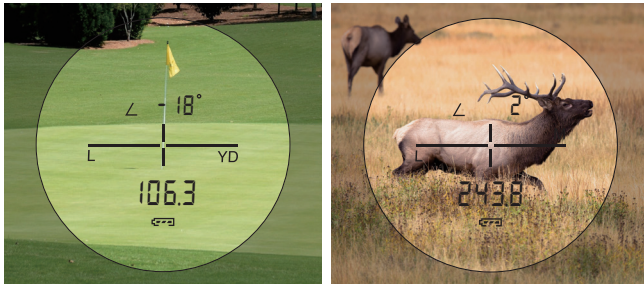

### The Accuracy As You Need

With our speedy measuring formula and accurate-tuned pulse, we guarantee you a fast measuring response time and a reliable result, over 500-meters the accuracy is ±0.3% and 100-meters to 500-meters is ±0.5%, PRF-1200 is designed for mid and long range and the one you can trust.

### Easy to Use And Access All Functions

PRF-SERIES has only two buttons which are easy to get hands-on, you do not have to worry about which measuring mode fits your needs but think what you want to measure, the straight distance, the horizontal distance or the height of the object. Simple push the buttons, you will get the reliable measurements in no time.

### Fit Your Palm w/ IP54 Protection

When you hold the PRF-SERIES in hands, you will be surprised by the size and the well-handheld feelings, it is only "160" gram with battery and size is 94.5cm x 65cm x 32cm with bold IP54 protection, bring the PRF-1200 to every duty you are heading to, be the new benchmark of measuring.



#### SPEC

Product Model	PRF-800	PRF-1200
Measuring Range	5-800yd / 5-730m	5-1200yd / 5-1100m
Accuracy	±0.3% (D>500m), ±0.5% (D<500m)	±0.3% (D>500m), ±0.5% (D<500m)
Amplification	6 X	6 X
Caliber	23 mm	23 mm
Pupil Distance	17 mm	17 mm
FOV	6°	6°
Measuring Speed	1 Second	0.3 Seconds
Angle	± 89°	± 89°
Waterproof	IP54	IP54
Monitor	LCD	LCD
Dimension	102*35*69 mm	102*35*69 mm
Weight	160 g	160 g

#### In The Box

- Laser Rangefinder
- CR2 Battery
- Carry Case
- Safety Strap
- Cleaning Cloth
- QuickStart

Dealer Stamp

